

PTFE CONVEYOR

Standard Supply

Design:

DIN 2848/2874

Range:

DN 15 - DN 600, PN 10


Material:

← PTFE

Variants

Material:

← Antistatic PTFE

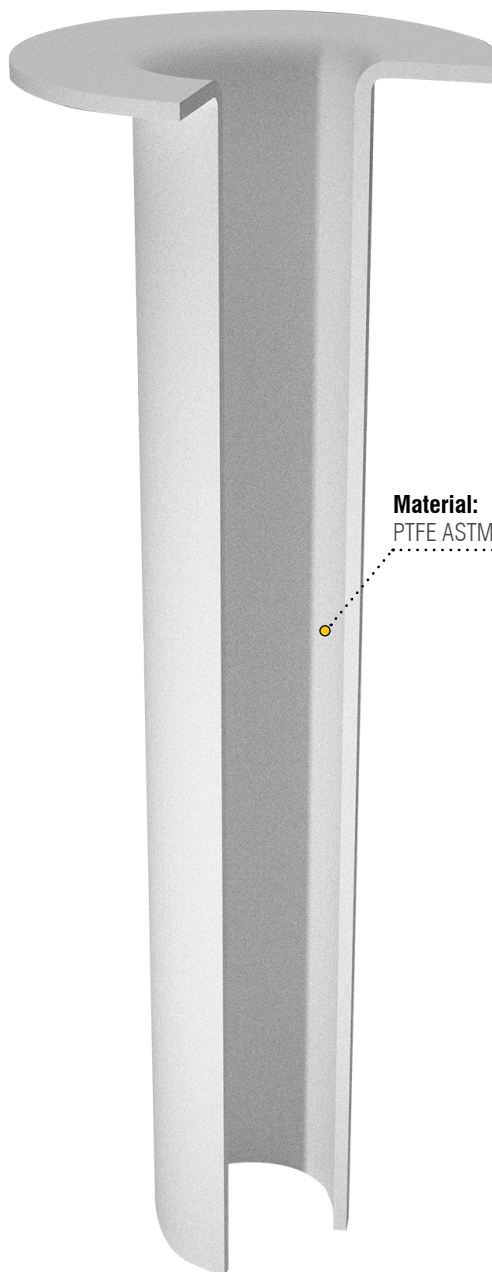

Material:
PTFE ASTM D-4894 or 4895



Antistatic version of Conveyor

Available on request



Approvals and Certifications



Quality and Special tests



Engineering Services



Special Supply



Stainless steel 304L/316L components



External Finiture



DIN

index


previous view

D2-64
data sheet

DIFLINE

D2

PTFE CONVEYOR

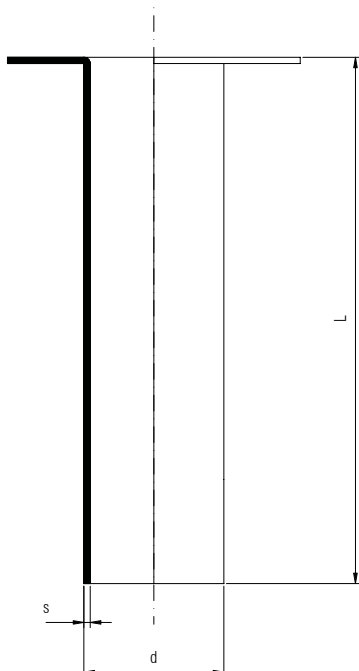

Dimension table

DN	L max. mm	d mm	s ± 10% mm
25	3000	24,5	3,0
32	3000	29,0	3,5
40	3000	32,0	3,5
50	3000	41,0	4
65	3000	60,0	4,5
80	3000	66,0	5
100	3000	94,5	5,5
125	3000	117	5,5
150	3000	139	6
200	3000	182	6,5
250	3000	231	7
300	3000	288	7,0
350	3000	277	7
400	3000	319	7

Technical specifications of Difline products



Pipes and Flanges dimensions according to DIN



Fittings dimensions according to DIN 2848



Operative Conditions



Bolt Torque



Finiture, Marking, Packing



Table of Chemical Resistance of Materials*