





□ AISI 316L SMS 1145 MALE RETAINER DIFLON C1

The fitting is supplied without ferrule and it is used in chemicals and food industries to connect hoses to equipments and plants in quickly and safely way.


Standard construction material is AISI 316L.

The DIN 405 threaded ferrule according to the Standard SMS 1145 can be supplied in AISI 304L and AISI 316L.

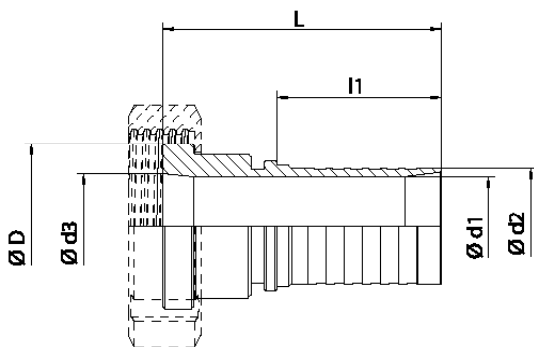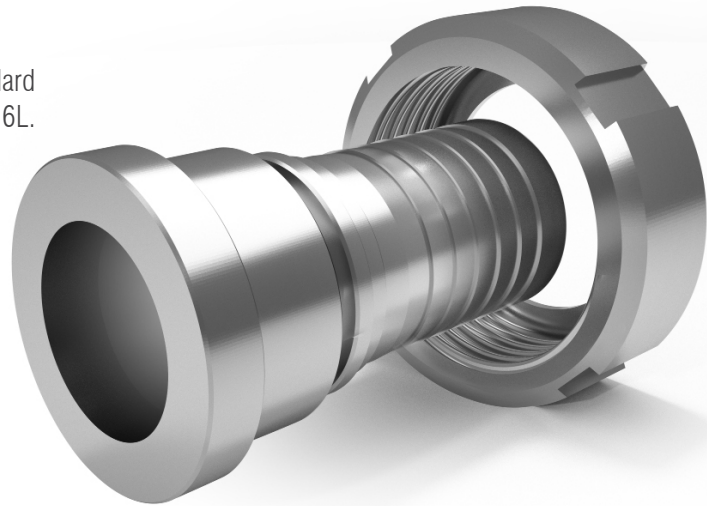

RECOMMENDED GASKET

DIFLEX SMS 1145 gasket, resistant to all acids and chemicals, pharmaceuticals and food products with temperatures from -170 °C to +270 °C and pressures up to 50 bar.



GASKET SMS 1145

DN	L	l1	Ø D	Ø d1	Ø d2	Ø d3
25 - 1"	80	34	32	21	25,7	22
40 - 1 1/2"	85	51	50	33	38,5	35
50 - 2"	95	62	60	46	51	48
65 - 2 1/2"	110	68	76	58	64	60
80 - 3"	130	81	88	69	75	72
100 - 4"	140	92	110	96	101	98

DN	Ø A	Ø B	C
25 - 1"	32	25	5,5
40 - 1 1/2"	48	36	5,5
50 - 2"	61	51	5,5
65 - 2 1/2"	73,5	63,5	5,5
80 - 3"	86	76	5,5
100 - 4"	113,5	102	5,5