

GASKETS FOR BS 4825 CLAMP FITTINGS

Application examples DIFLEX

In specific design Clamp BS 4825 gasket in DIFLEX

Applications

Acids, Strong alkali, Solvents, Catalyzers, Aromatics, Foods, Pharmaceuticals, Chemicals, Petrochemicals, etc.

- Operating temperature: $-150^{\circ} + 260^{\circ} \text{C}$
- Working pressure at room temperature: 50 bar


Application examples SILICON

In specific design Silicon (VMQ)


Applications

Oils, Fats, Oxidations (oxygen and ozone even hot), Medical Products, Pharmaceuticals, Biologicals, Foods, etc.
we can provide special silicones for specific uses.

- Operating temperature: $-140^{\circ} + 200^{\circ} \text{C}$
- Working pressure at room temperature: 10 bar

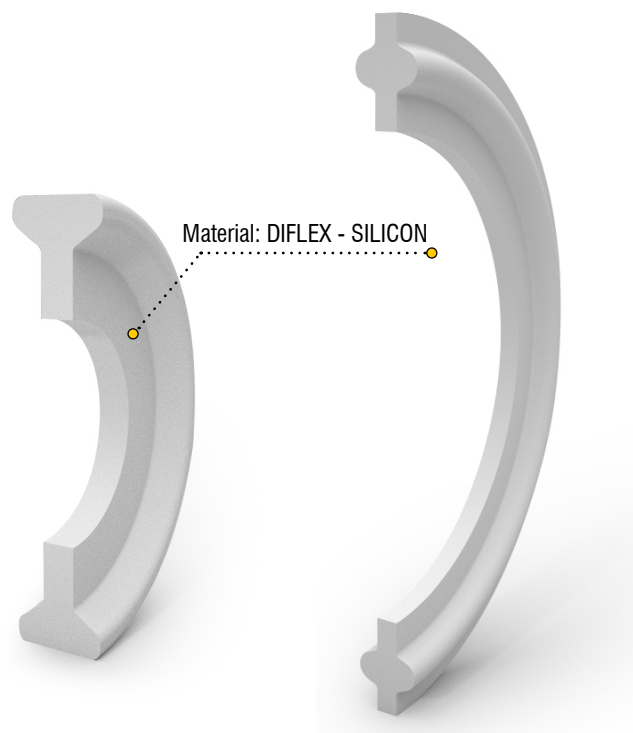

Service gaskets for fitting type:

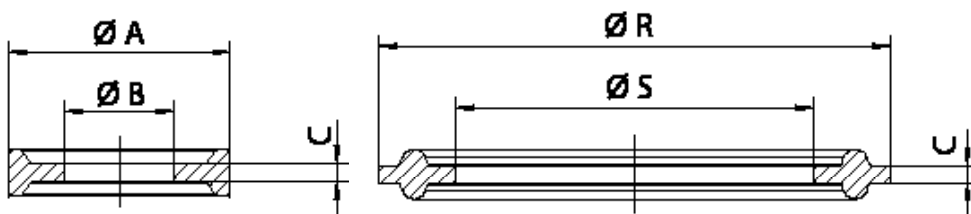

Gaskets dimensions

DN	Ø A	Ø B	C	Ø R	Ø S
15 - 1/2"	22	9,6	1,7	-	-
20 - 3/4"	22	16	1,7	-	-
25 - 1"	-	-	1,7	50,5	22,1
32 - 1 1/4"	-	-	1,7	50,5	35,1
40 - 1 1/2"	-	-	1,7	64	47,4
50 - 2"	-	-	1,7	77,5	60,5
65 - 2 1/2"	-	-	1,7	91	73,2
80 - 3"	-	-	1,7	119	97,5
100 - 4"	-	-	1,7	167	146,9

